
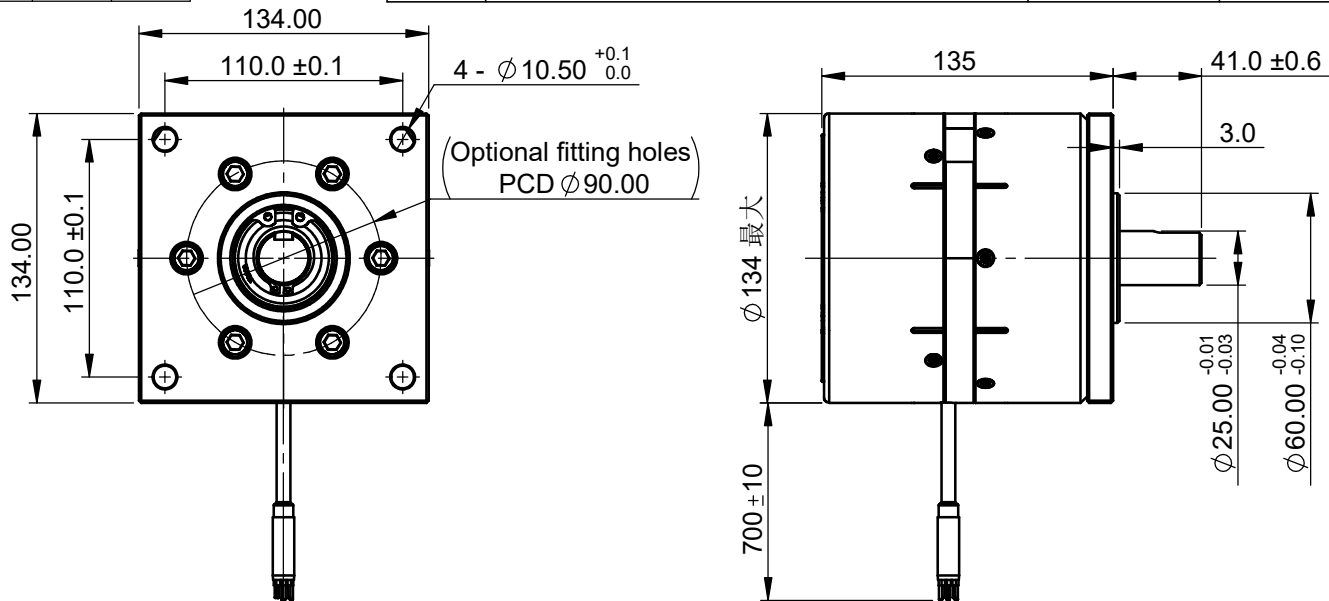




ITEM	16AWG 1332		26AWG 1332		Version	Description		Revision No.	Date	Signature
Color	Yellow	Green	Blue	Black	Yellow	Green	Blue	Initial Release		2024-11-02
Signal	U	V	W	-	HU	HV	HW			


PHASE SEQUENCE DIAGRAM

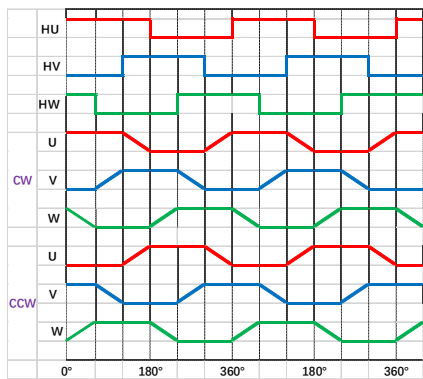

General Specifications

No	Item	Value
1	Motor Type	3Phase BLDC
2	IP Grade	IPX4
3	Ratio	1:6
4	Backlash	12arcmin <
5	No. of Poles	30
6	Rated voltage (VDC)	24
7	F/L speed (rpm)	26
8	F/L current (A)	0.2
9	Rated speed (rpm)	20
10	Rated current (A)	1.4
11	Rated torque (N.m)	10
12	Rated output power (W)	24
13	Stall torque (N.m)	25
14	Insulation resistance	> 50MΩ (500VDC)
15	Insulation class	F (155°C)
16	Operating temperature range (°C)	-25 ~ +85
17	Operating relative humidity (RH)	10 - 90
18	Direction of rotation	CW & CCW

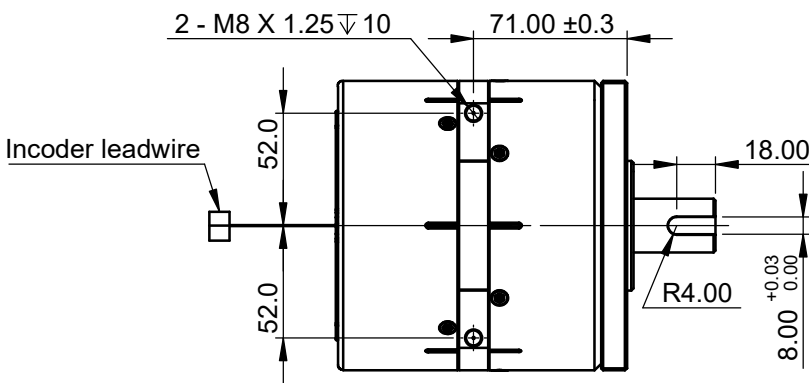

Unmarked tolerance reference ISO2768-1 Class M	Signature	Date	 www.mrcmotion.com
	Designed by		
Unit: mm	Checked by		Project No. MRC134
Confidentiality All information contained in this drawing is prohibited from copying, plagiarizing, and leaking without permission.	Approval		Name MOTOR OUTLINE DRAWING
			Drawing No.